




Collision type decision device

Patent number: DE10223522
Publication date: 2003-04-30
Inventor: UGUSA AKI (JP); YAMASHITA TOSHIYUKI (JP)
Applicant: MITSUBISHI ELECTRIC CORP (JP)
Classification:
- international: **B60R21/01; B60R21/01; (IPC1-7): B60R21/01**
- european: B60R21/01C3
Application number: DE20021023522 20020527
Priority number(s): JP20010318395 20011016

Also published as:


 US6728604 (B2)
 US2003074111 (A1)
 JP2003118532 (A)

[Report a data error here](#)

Abstract not available for DE10223522

Abstract of correspondent: **US2003074111**

A collision type decision device includes left and right deceleration detectors, an arithmetic unit, an average calculating unit, and a decision unit. The left and right deceleration detectors are located at left and right front portions of a vehicle for detecting decelerations at the left and right front portions, respectively. The arithmetic unit calculates the decelerations detected by the deceleration detectors to obtain arithmetic results with respect to the left and right portions of the vehicle. The average calculating unit calculates an average of the arithmetic results. The decision unit compares the average with a threshold and decides whether a collision type of the vehicle is a symmetric or asymmetric on the basis of the comparison.

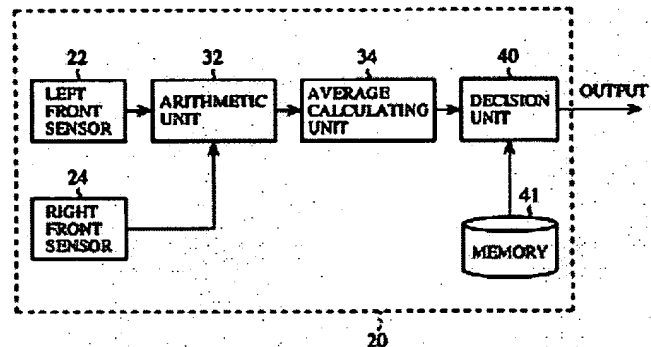

Data supplied from the **esp@cenet** database - Worldwide


[my account](#) [learning center](#) [patent cart](#) [document ca](#)
[home](#)[research](#) ▾[patents](#) ▾[alerts](#) ▾[documents](#) ▾**Format Examples****US Patent**

US6024053 or 6024053

US Design Patent

D0318249

US Plant Patents

PP8901

US Reissue

RE35312

US SIR

H1523

US Patent Applications

20020012233

World Patents

WO04001234 or WO2004012345

European

EP1067252

Great Britain

GB2018332

German

DE29980239

Nerac Document Number (NDN)

certain NDN numbers can be used for patents

[view examples](#)6.0 recommended
Win98SE/2000/XP**Patent Ordering****Enter Patent Type and Number:** optional reference note


☐ Add patent to cart automatically. If you uncheck this box then you must *click on* Publication number and view abstract to Add to Cart.

42 Patent(s) in Cart

Patent Abstract


GER 2003-04-30 10223522 **KOLLISIONSFORM-
ENTSCHEIDUNGSEINRICHTUNG**

INVENTOR- YAMASHITA TOSHIYUKI JP**APPLICANT-** MITSUBISHI ELECTRIC CORP JP**PATENT NUMBER-** 10223522/DE-A1**PATENT APPLICATION NUMBER-** 10223522**DATE FILED-** 2002-05-27**DOCUMENT TYPE-** A1, DOCUMENT LAID OPEN (FIRST PUBLICATION)**PUBLICATION DATE-** 2003-04-30**INTERNATIONAL PATENT CLASS-** B60R02101;
B60R02101C3**PATENT APPLICATION PRIORITY-** 2001318395, A**PRIORITY COUNTRY CODE-** JP, Japan**PRIORITY DATE-** 2001-10-16**FILING LANGUAGE-** German**LANGUAGE-** German NDN- 203-0522-9431-1

EXEMPLARY CLAIMS- 1. Collision form decision mechanism (20, 20 A, 220,230), those covers: a left and right delay detector (22, 24), which at the left and/or right front of a vehicle (10) to the collection of delays at the left and/or which right front it is arranged an average computation unit (34) to the computation of an average value on the basis of the delays seized by the left and right delay detector and a decision unit (40, 42, 46) to the comparison of the average with a threshold value and for decision on the basis of a comparison whether it concerns with a collision form of the vehicle a symmetrical or an

asymmetrical. 2. Collision form decision mechanism (20, 20 A, 220,230) according to requirement 1, furthermore an arithmetic unit (32, 38) to the computation of the delays for the preservation of results of computation regarding the left and right part of the vehicle (10), seized by the delay detectors (22, 24), whereby the average computation unit (34) with the results of computation computes an average. 3. Collision form decision mechanism (20, 20 A, 220,230) according to requirement 1, whereby the average computation unit (34) computes an average of the delays it was seized, those by the right and by the left delay detector (22, 24). 4. Collision form decision mechanism (320) after one of the requirements 1 to 3, furthermore covers: a central delay detector (26), which is arranged in the middle part of the vehicle for the collection of a delay at the middle part, whereby the decision unit (46) compares the threshold value with a change of the average, which was computed by the average computation unit (34) for one time interval, before a value on the basis of the delay in the middle part achieves a certain size, and on the basis of the comparison decides whether a collision form of the vehicle is symmetrical or asymmetrical, and no decision over the collision form of the vehicle on the basis of the left and the right delay spends, after the value which is based on the

NO-DESCRIPTORS

 [proceed to checkout](#)

Nerac, Inc. One Technology Drive . Tolland, CT
Phone (860) 872-7000 Fax (860) 875-1749

©1995-2003 All Rights Reserved . [Privacy Statement](#) . [Report a Problem](#)